Also available in the self-contained range for "Bistrot" cube:

B 21, B 31, B 40, B50, B65, B90 See pertaining literature for more details







B 18 AS/WS

Bar-Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar-Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar-Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that

allow for built-in installations.


Front air louvers assure appropriate airflow in critical installrequirements.

- Contemporary, elegant design unites excellent operational features with the reliability obtained through years of succesfull experience in ice making technology.
- ✓ Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces.
- Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.



**B** 18

Also available in the self-contained range for "Bistrot" cube: **B 21, B 31, B 40, B50, B65, B90** See pertaining literature for more details

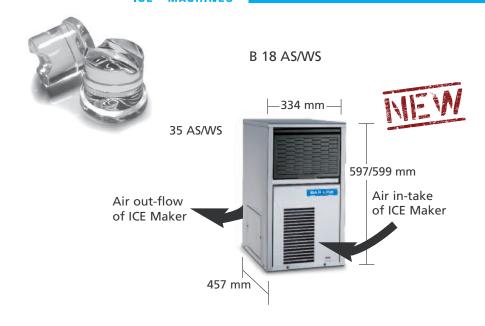

OPERATING LIMITS							
Air Temp. Range	10°C - 40°C						
Water Temp. Range	5°C - 35°C						
Water Pressure	Min. 1 bar Max. 5 bar						
Electrical Voltage	230V/50Hz/pH (on selected models)						

All specifications and performance data are subject to normal manufacturing variances.

All units have stainless steel finish. Refrigerant: R-134a



**Installation Note:** allow 152 mm minimum space at back for utility connections.

ORDERING AND SPECIFICATION INFORMATION										
Model No.	Cond. Unit	ICE Production per 24 hrs. at 10°C Air/10°C Water Kgs.	Bin Storage Kgs.	Voltage Characteristics	Refrigerant	Water Consumption Lt/60'	Electric Consumption kwh/24h	Net Weight Kgs.	Max. Shipping Weight Kgs.	
B 18 AS	Air	20	6,5	230/50/1	R 134a	6	6,3	28	33	
B 18 WS	Water	20	6,5	230/50/1	R 134a	28	6,3	28	33	





