

BAR LINE - Modular Casinò Ice Maker

BAR LINE

ICE - MACHINES



BFM 800 AS/WS
on BIN 55

Bar-Line Equipment range is the well-known EU-made line of ice machines used and appreciated by many for its reliability. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European-made components to assure maximum ice-quality and machine longevity. Quality tested one-by-one, the Bar-Line self-contained units feature a well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology.

BFM 800

Also available:
BFM 1256.
See pertaining literature
for more details

- ✓ Only 533 mm wide.
- ✓ Produces up to 390 kg of ice per day.
- ✓ SystemSafe load monitoring system constantly checks workload on gearbox - shutting down system before a problem develops and preventing costly repairs.
- ✓ Water sensor eliminates low or no water failures and cannot be affected by adverse water conditions.
- ✓ Rugged stainless steel evaporator and auger ensures reliability.
- ✓ Industrial-grade roller bearings and heavy-duty gearbox provide years of trouble-free service.

BAR LINE

ICE - MACHINES

BFM 800




BFM 800 AS/WS on BIN 55

OPERATING LIMITS

Air Temp. Range	10°C - 40°C
Water Temp. Range	5°C - 35°C
Water Pressure	Min. 1 bar Max. 5 bar
Electrical Voltage	230V/50Hz/pH (on selected models)

All specifications and performance data are subject to normal manufacturing variances.

All units have stainless steel finish.
Refrigerant: R 404A

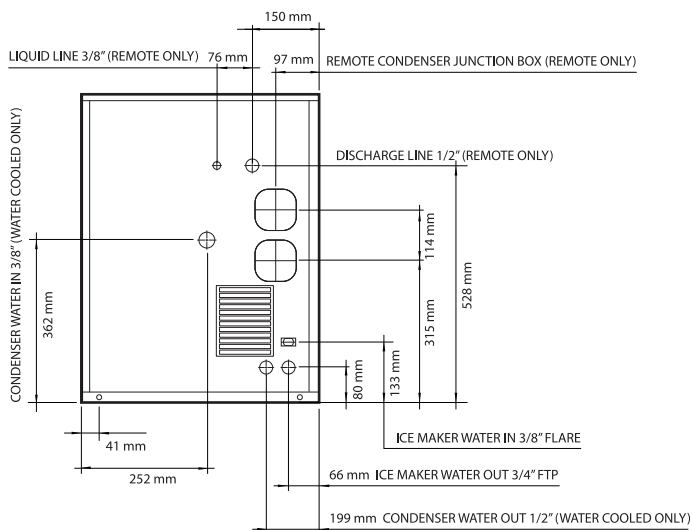

ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. Unit	ICE Production per 24 hrs. at 10°C Air/10°C Water Kgs.	Ice Storage Bins to use	Voltage Characteristics	Refrigerant	Water Consumption Lt/60'	Electric Consumption kwh/24h	Net Weight Kgs.	Max. Shipping Weight Kgs.
BFM 800 AS	Air	348	BIN25+KBT19-BIN40+KBT19 BIN42+KBT24 - BIN55+KBT19	230/50/1	R 404A	-	-	-	93
BFM 800 AS	Water	390	BIN25+KBT19-BIN40+KBT19 BIN42+KBT24 - BIN55+KBT19	230/50/1	R 404A	-	-	-	91



We reserve the right to make changes in design and construction at any time without obligation.
ADV-Bar-Line 11/2010



Frimont S.p.A.
Via Lainate 31/b - 20010 Pogliano Milanese - (Milano) Italy
Tel. +39.02.93960.239 - Fax +39.02.93960.201
barline@frimont.it - www.barline.it