

Other models in this range:
MC 46 - MC 1210

Gourmet Cube Ice Machine up to 170 Kg



Proximity condenser air filter (AS version only)



Front ON-OFF Switch



MC 16 "SHORT" with SB 393 (sold separately)



Circular evaporator



Optional




ABS plastic cover



Features

- Produces individual Gourmet crystal clear supercubes
- Up to 170 kg (374 lbs) daily ice cubes production
- ABS plastic top cover
- Dual ice discharge possibility: vertical ice-chute (standard) or side ice-chute (optional)
- "Universal Standard 30" width fits on most popular ice storage bins
- Resistant stainless steel exterior
- Computer controlled with advanced diagnostics capabilities
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-404A Refrigerant
- 2 years manufacturer warranty

MC 16 "SHORT" Technologies



| | +C° -C° | 10°: 10°C | | 21°: 15°C | | [WxDxH mm] 772x608x710 | | |
|----------------------------|----------------|-----------|-------|-----------|-----|-------------------------------|---|--|
| | | [kg] | [lbs] | N° | N°* | | [WxDxH inches] 30 3/8"x23 15/16"x27 15/16" | |
| | | [kg] | [lbs] | N° | N° | | | |
| MC S 16 Short AS | | 170 | 379 | 21250 | 150 | 330 | 18750 | |
| MC S 16 Short WS | | 172 | 379 | 21500 | 162 | 357 | 20250 | |
| MC M 16 Short AS | | 170 | 374 | 8500 | 150 | 330 | 7500 | |
| MC M 16 Short WS | | 172 | 379 | 8600 | 162 | 357 | 8100 | |
| MC L 16 Short AS | | 153 | 337 | 3920 | 140 | 308 | 3590 | |
| MC L 16 Short WS | | 155 | 341 | 3974 | 146 | 322 | 3744 | |
| *Estimated number of cubes | | | | | | [v/Hz/ph] 230/50/1 | R 404 A | |

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Gourmet Cube Ice Machine up to 170 Kg

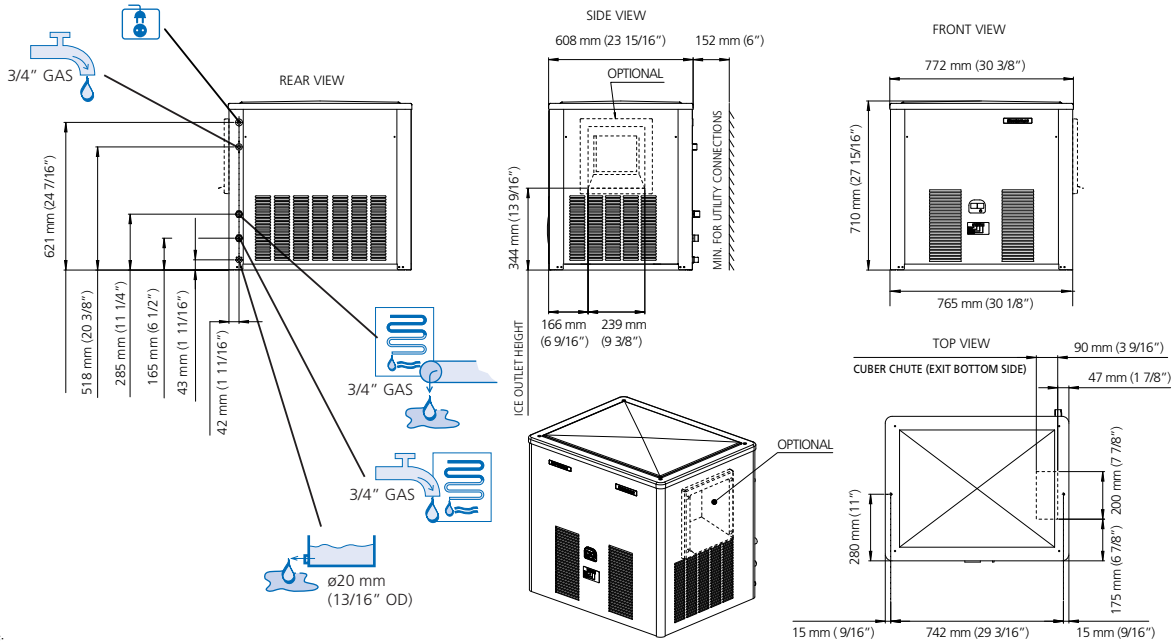

NOTE:
IF THE UNIT IS INSTALLED AS A BUILT-IN/UNDERCOUNTER,
BETWEEN 5 AND 10 mm ON EACH SIDE MUST BE CONSIDERED
TO ALLOW FOR EASE OF INSTALLATION

MC16 SHORT AIR COOLED

| °C °F | °C | | | | kg |
|----------|------------|------------|------------|------------|-----|
| | 50° 10° | 60° 15° | 70° 21° | 90° 32° | |
| 10° | 170 | 165 | 158 | 146 | kg |
| 50° | 374 | 363 | 348 | 324 | lbs |
| 21° | 156 | 150 | 144 | 132 | kg |
| 70° | 343 | 330 | 317 | 291 | lbs |
| 32° | 134 | 128 | 122 | 110 | kg |
| 90° | 293 | 282 | 269 | 242 | lbs |
| 38° | 122 | 116 | 110 | 98 | kg |
| 100 | 266 | 253 | 240 | 216 | lbs |

MC16 SHORT WATER COOLED

| °C °F | °C | | | | kg |
|----------|------------|------------|------------|------------|-----|
| | 50° 10° | 60° 15° | 70° 21° | 90° 32° | |
| 10° | 172 | 165 | 158 | 144 | kg |
| 50° | 379 | 363 | 348 | 317 | lbs |
| 21° | 168 | 162 | 155 | 142 | kg |
| 70° | 370 | 357 | 341 | 313 | lbs |
| 32° | 167 | 160 | 153 | 138 | kg |
| 90° | 368 | 352 | 337 | 304 | lbs |
| 38° | 164 | 157 | 150 | 136 | kg |
| 100 | 361 | 346 | 330 | 299 | lbs |



Minimum

Maximum

10°C (50°F)

40°C (104°F)

5°C (41°F)

35°C (95°F)

-10%

+10%

1 BAR
14 psi

5 BAR
70 psi

| | Ice [kg] | Power [W] | Water [l/h] | Current [A] | FUSE [A] | Energy [kWh] | Capacity [kg] | Water [l/h] | Power [W] | Current [A] | FUSE [A] | Energy [kWh] | Capacity [kg] |
|------------------|-------------|--------------|----------------|----------------|-------------|-----------------|------------------|----------------|--------------|----------------|-------------|-----------------|------------------|
| MC S 16 Short AS | 85 | 13200 | 3x1.5 - 5x1.5 | 20 A | 20 A | 22,3 | 170 | 1450 | 20 A | 20 A | 22,3 | 170 | 85 |
| MC S 16 Short WS | 84 | 13200 | 3x1.5 - 5x1.5 | 20 A | 20 A | 18,2 | 170 | 1000 | 20 A | 20 A | 18,2 | 170 | 84 |
| MC M 16 Short AS | 85 | 13200 | 3x1.5 - 5x1.5 | 20 A | 20 A | 22,3 | 156 | 1450 | 20 A | 20 A | 22,3 | 156 | 85 |
| MC M 16 Short WS | 84 | 13200 | 3x1.5 - 5x1.5 | 20 A | 20 A | 16,3 | 156 | 1000 | 20 A | 20 A | 16,3 | 156 | 84 |
| MC L 16 Short AS | 85 | 13200 | 3x1.5 - 5x1.5 | 20 A | 20 A | 21,5 | 134 | 1450 | 20 A | 20 A | 21,5 | 134 | 85 |
| MC L 16 Short WS | 84 | 13200 | 3x1.5 - 5x1.5 | 20 A | 20 A | 16,5 | 134 | 1000 | 20 A | 20 A | 16,5 | 134 | 84 |