

Other models in this range:
 MF 46 - MF 56 - MF 58 Split
 MF 66 - MF 68 SPLIT
 MF 86 - MF 88 SPLIT

Modular Super-Flake Ice Machine up to 1220 Kg



Stainless Steel

Electronic Controls



2xMF 68 Split+UBH1100
(sold separately)



2xMF 68 Split+UBH1600
(sold separately)



2xMF 68 Split+UBH2250
(sold separately)



2xMF 68 Split+SIS1350
(sold separately)



MF 68 Split+RBCSTAND
(sold separately)



Features

- Modular Superflake ice machine, production up to 1,220 kg in 24 hours
- Split unit, supplied with evaporator only, needs to be connected to remote condensing unit or central cooling system (low temperature)
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings.
- Double protection – electronic rotation sensor and drive coupling -on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- ABS plastic top cover.
- Reduced height to ease installation.

Optional Features (special order):

- UV lamp for bacterial control.
- Anti-scale, anti-algae water filtration system.

MF 68 Split Technologies



	24h 10°: 10°C [kg] [lbs]		21°: 15°C [kg] [lbs]		W D H [WxDxH mm] 538x663x790
MF 68 Split	1220	2690	1170	2578	
					[WxDxH inches] 213/16" x 261/8" x 31 1/8"
	[v/Hz/ph] 230/50/1		R 404 A		



Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.

Residual water content 15%

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Other models in this range:
 MF 46 - MF 56
 MF 66 - MF 68 SPLIT
 MF 86 - MF 88 SPLIT

Modular Super-Flake Ice Machine up to 1220 Kg

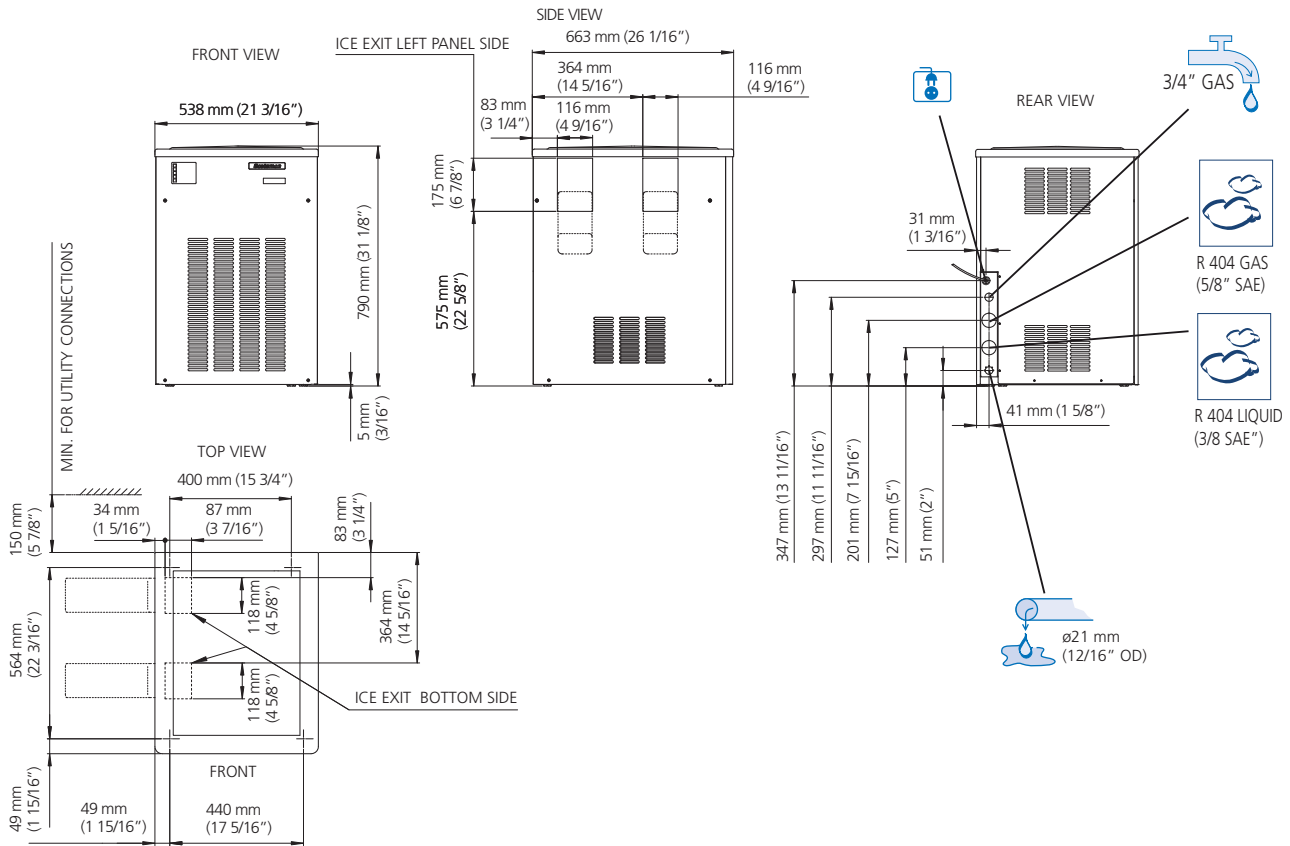

MF 68 SPLIT

°C \ °F	°C			
	50°	60°	70°	90°
10-38°	1220	1170	1100	900
50-100°	2690	2579	2425	1984
				kg
				lbs



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	R404A/R507 (T. ev: -16°C or 3,2°F; T. cond. +40°C or 104°F)		[W] [A]		[kg] [lbs]		[kg] [lbs]	
MF 68 Split	4600	15686	400	1,4	98	216	107	235